

Silicon PNP Power Transistors

2SB1367

DESCRIPTION


- With TO-220F package
- Complement to type 2SD2059
- Low collector saturation voltage:
 $V_{CE(sat)} = -2.0V(\text{Max})$ at $I_C = -4A, I_B = -0.4A$
- Collector power dissipation:
 $P_C = 30W(T_C = 25^\circ\text{C})$

APPLICATIONS

- With general purpose applications

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector
3	Base

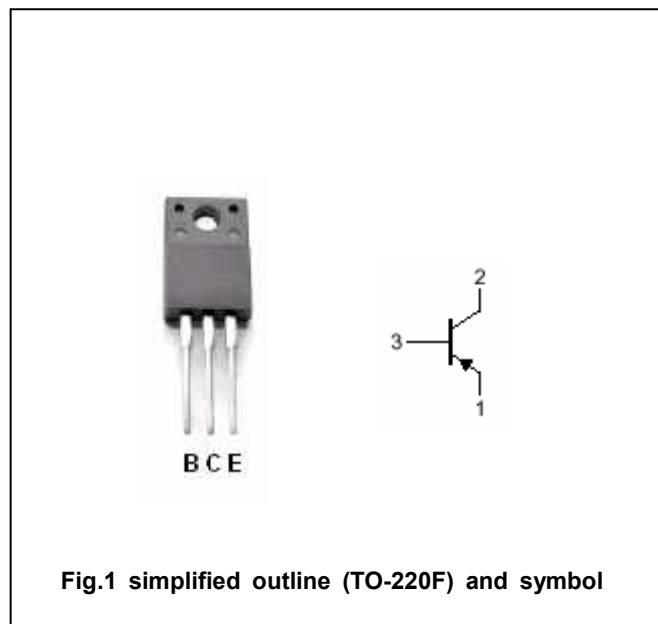Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-100	V
V_{CEO}	Collector-emitter voltage	Open base	-100	V
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current		-5	A
I_B	Base current		-0.5	A
P_C	Collector dissipation	$T_C = 25^\circ\text{C}$	30	W
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon PNP Power Transistors

2SB1367

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-50mA ; I_B=0$	-100			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=-4A ; I_B=-0.4A$			-2.0	V
V_{BE}	Base-emitter on voltage	$I_C=-4A ; V_{CE}=-5V$			-1.5	V
I_{CBO}	Collector cut-off current	$V_{CB}=-100V ; I_E=0$			-0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=-5V ; I_C=0$			-1.0	mA
h_{FE-1}	DC current gain	$I_C=-1A ; V_{CE}=-5V$	40		240	
h_{FE-2}	DC current gain	$I_C=-4A ; V_{CE}=-5V$	20			
f_T	Transition frequency	$I_C=-1A ; V_{CE}=-5V$		5.0		MHz
C_{OB}	Collector output capacitance	$f=1MHz ; V_{CB}=-10V$		270		pF

◆ h_{FE-1} Classifications

R	O	Y
40-80	70-140	120-240

Silicon PNP Power Transistors

2SB1367

PACKAGE OUTLINE

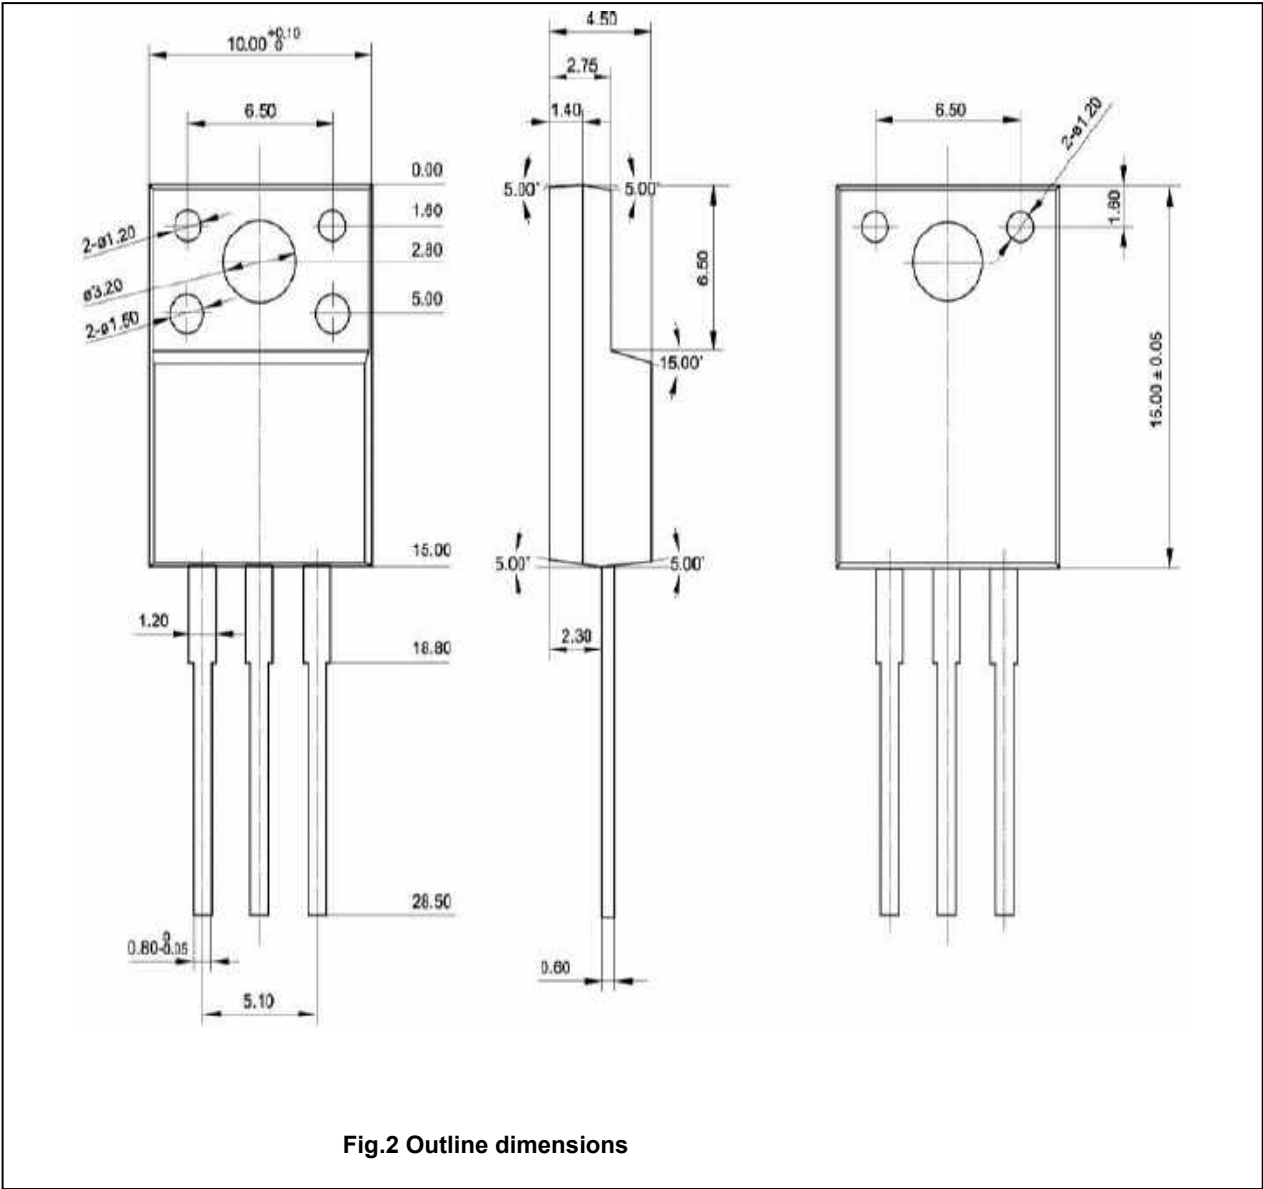


Fig.2 Outline dimensions

Silicon PNP Power Transistors

2SB1367

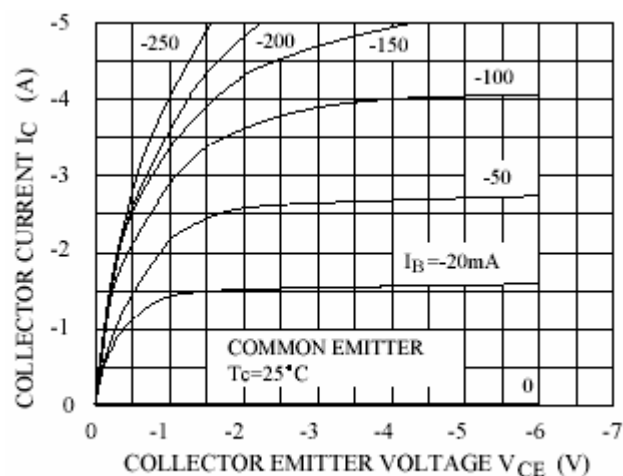


Fig.3 Static Characteristic

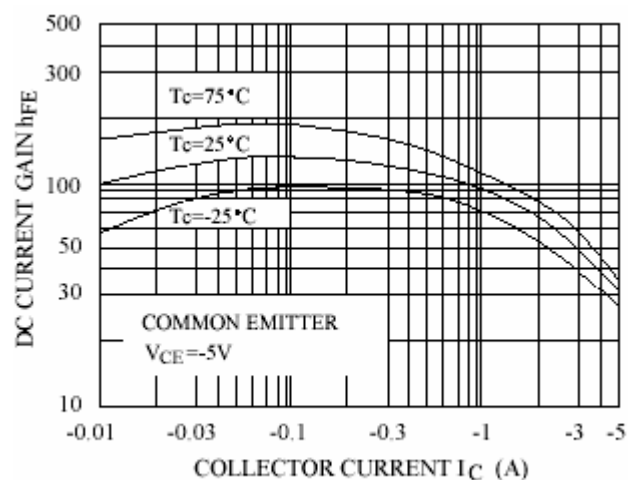


Fig.4 DC current Gain

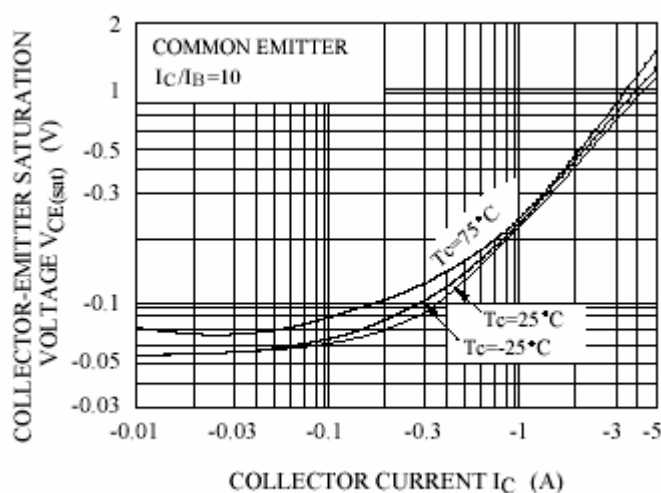


Fig.5 Collector-Emitter Saturation Voltage

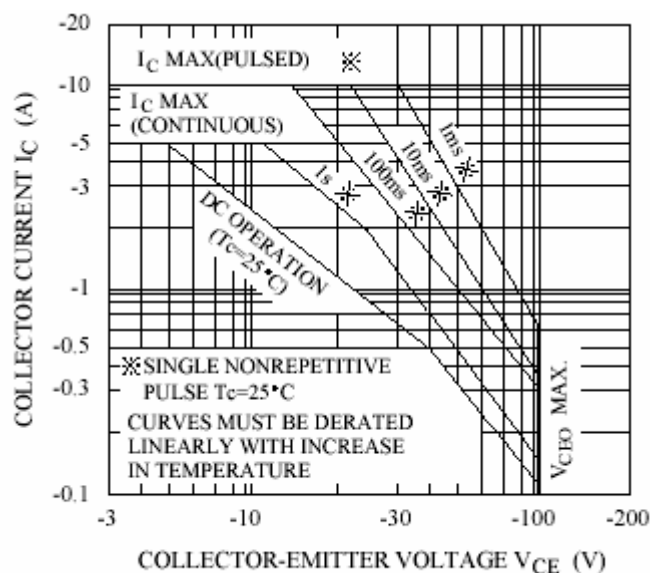


Fig.6 Safe Operating Area