

isc Silicon NPN Power Transistor

2SC3552

DESCRIPTION



- High Breakdown Voltage
- High Switching Speed
- Wide Area of Safe Operation

APPLICATIONS

- Designed for switching regulator applications.

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	1100	V
V _{CEO}	Collector-Emitter Voltage	800	V
V _{EBO}	Emitter-Base Voltage	7	V
I _C	Collector Current- Continuous	12	A
I _{CM}	Collector Current-Peak	30	A
I _B	Base Current- Continuous	6	A
P _C	Collector Power Dissipation @ T _C =25℃	150	W
T _J	Junction Temperature	150	℃
T _{stg}	Storage Temperature Range	-55~150	℃

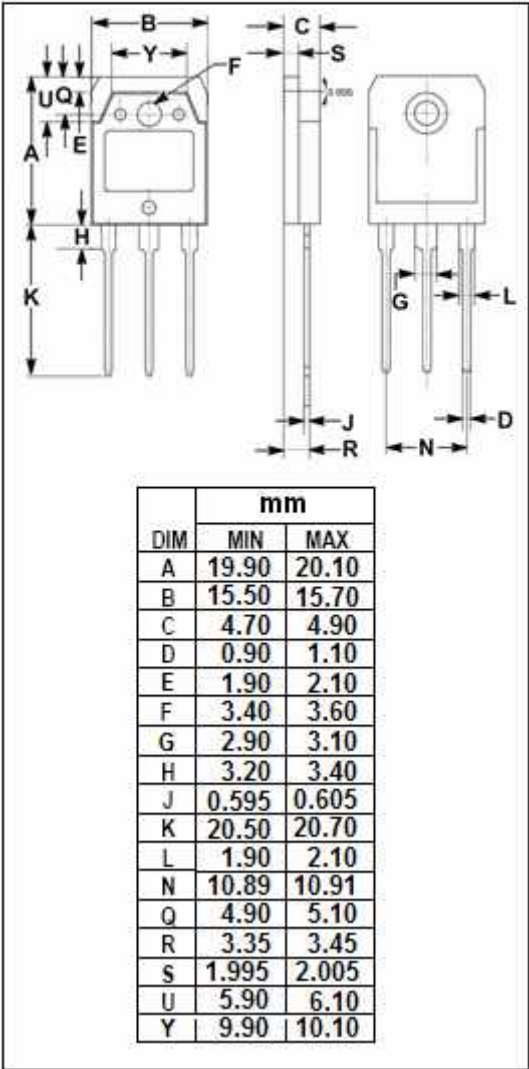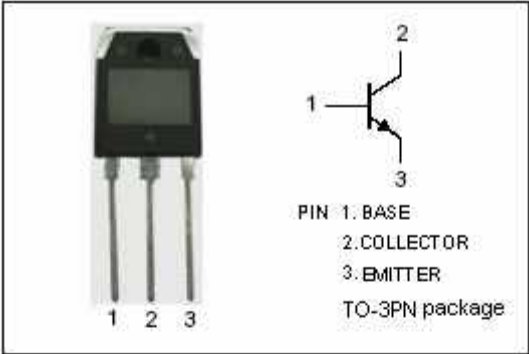

isc Silicon NPN Power Transistor

2SC3552

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=5\text{mA}$; $R_{BE}=\infty$	800			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=1\text{mA}$; $I_C=0$	7			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=1\text{mA}$; $I_E=0$	1100			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=6\text{A}$; $I_B=1.2\text{A}$			2.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=6\text{A}$; $I_B=1.2\text{A}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=800\text{V}$; $I_E=0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}$; $I_C=0$			10	μA
h_{FE-1}	DC Current Gain	$I_C=0.8\text{A}$; $V_{CE}=5\text{V}$	10		40	
h_{FE-2}	DC Current Gain	$I_C=4\text{A}$; $V_{CE}=5\text{V}$	8			
C_{OB}	Output Capacitance	$I_E=0$; $V_{CB}=10\text{V}$; $f_{test}=1.0\text{MHz}$		215		pF
f_T	Current-Gain—Bandwidth Product	$I_C=0.8\text{A}$; $V_{CE}=10\text{V}$		15		MHz

Switching Times

t_{on}	Turn-on Time	$I_C=8\text{A}$, $I_{B1}=1.6\text{A}$; $I_{B2}=-3.2\text{A}$ $R_L=500\Omega$; $V_{CC}=400\text{V}$			0.5	μs
t_{stg}	Storage Time				3.0	μs
t_f	Fall Time				0.3	μs

◆ h_{FE-1} Classifications

K	L	M
10-20	15-30	20-40