



## QUAD EXCLUSIVE-OR GATE

- MEDIUM-SPEED OPERATION –  $t_{PHL} = t_{PLH} = 60\text{ns}$  (typ.) @  $C_L = 50\text{pF}$  and  $V_{DD} - V_{SS} = 10\text{V}$
- LOW OUTPUT IMPEDANCE :  $500\Omega$  (typ.) @  $V_{DD} - V_{SS} = 10\text{V}$
- QUIESCENT CURRENT SPECIFIED TO 20V FOR HCC DEVICE
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- 5V, 10V, AND 15V PARAMETRIC RATINGS
- INPUT CURRENT OF 100nA AT 18V AND 25°C FOR HCC DEVICE
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC TENTATIVE STANDARD N° 13A, "STANDARD SPECIFICATIONS FOR DESCRIPTION OF "B" SERIES CMOS DEVICES"



**EY**  
(Plastic Package)



**F**  
(Ceramic Frit Seal Package)



**M1**  
(Micro Package)



**C1**  
(Plastic Chip Carrier)

### ORDER CODES :

HCC4030BF  
HCF4030BEY


HCF4030BM1  
HCF4030BC1

### DESCRIPTION


The **HCC4030B** (extended temperature range) and **HCF4030B** (intermediate temperature range) are monolithic integrated circuit, available in 14-lead dual in-line plastic or ceramic package and plastic micro package.

The **HCC/HCF4030B** types consist of four independent exclusive-OR gates integrated on a single monolithic silicon chip. Each exclusive-OR gate consists of four n-channel and four p-channel enhancement-type transistors. All inputs and outputs are protected against electrostatic effects.

### PIN CONNECTIONS

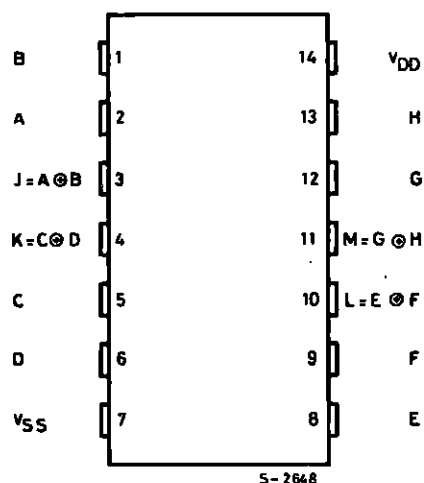

## FUNCTIONAL DIAGRAM

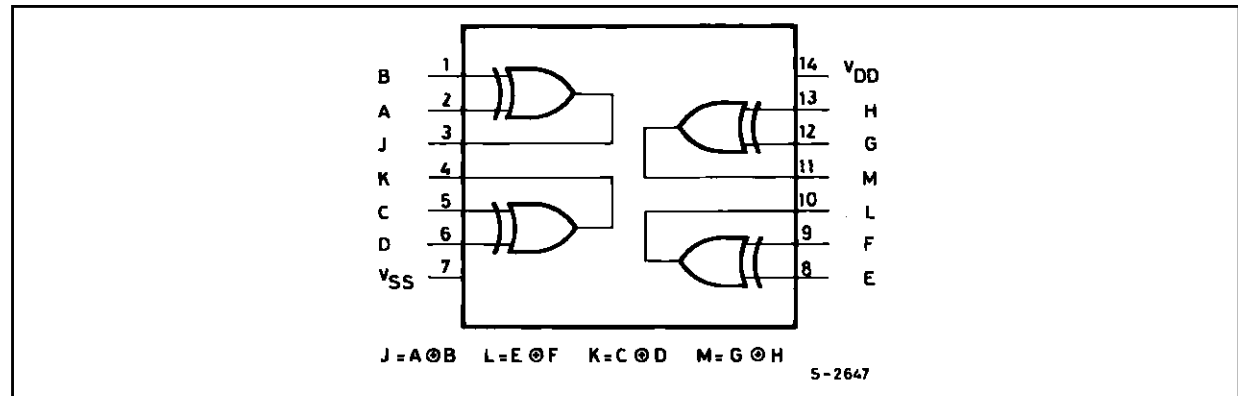

## ABSOLUTE MAXIMUM RATINGS

| Symbol     | Parameter                                                                                                                   | Value                          | Unit     |
|------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------|
| $V_{DD}^*$ | Supply Voltage : <b>HCC</b> Types<br><b>HCF</b> Types                                                                       | – 0.5 to + 20<br>– 0.5 to + 18 | V<br>V   |
| $V_i$      | Input Voltage                                                                                                               | – 0.5 to $V_{DD} + 0.5$        | V        |
| $I_i$      | DC Input Current (any one input)                                                                                            | $\pm 10$                       | mA       |
| $P_{tot}$  | Total Power Dissipation (per package)<br>Dissipation per Output Transistor<br>for $T_{op}$ = Full Package-temperature Range | 200<br>100                     | mW<br>mW |
| $T_{op}$   | Operating Temperature : <b>HCC</b> Types<br><b>HCF</b> Types                                                                | – 55 to + 125<br>– 40 to + 85  | °C<br>°C |
| $T_{stg}$  | Storage Temperature                                                                                                         | – 65 to + 150                  | °C       |

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for external periods may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS


| Symbol   | Parameter                                                    | Value                         | Unit     |
|----------|--------------------------------------------------------------|-------------------------------|----------|
| $V_{DD}$ | Supply Voltage : <b>HCC</b> Types<br><b>HCF</b> Types        | 3 to 18<br>3 to 15            | V<br>V   |
| $V_i$    | Input Voltage                                                | 0 to $V_{DD}$                 | V        |
| $T_{op}$ | Operating Temperature : <b>HCC</b> Types<br><b>HCF</b> Types | – 55 to + 125<br>– 40 to + 85 | °C<br>°C |

## TRUTH TABLE

One of Four Identical Gates

| A | B | J |
|---|---|---|
| 0 | 0 | 0 |
| 1 | 0 | 1 |
| 0 | 1 | 1 |
| 1 | 0 | 0 |

Where "1" = High level  
      "0" = Low level.



## STATIC ELECTRICAL CHARACTERISTICS (over recommended operating conditions)


| Symbol                            | Parameter             |           | Test Conditions       |                       |                          |                        | Value              |       |                   |       |       |                     |      | Unit |
|-----------------------------------|-----------------------|-----------|-----------------------|-----------------------|--------------------------|------------------------|--------------------|-------|-------------------|-------|-------|---------------------|------|------|
|                                   |                       |           | V <sub>I</sub><br>(V) | V <sub>O</sub><br>(V) | I <sub>O</sub>  <br>(μA) | V <sub>DD</sub><br>(V) | T <sub>Low</sub> * |       | 25°C              |       |       | T <sub>High</sub> * |      |      |
|                                   |                       |           |                       |                       |                          |                        | Min.               | Max.  | Min.              | Typ.  | Max.  | Min.                | Max. |      |
| I <sub>L</sub>                    | Quiescent Current     | HCC Types | 0/ 5                  |                       |                          | 5                      |                    | 1     |                   | 0.02  | 1     |                     | 30   | μA   |
|                                   |                       |           | 0/10                  |                       |                          | 10                     |                    | 2     |                   | 0.02  | 2     |                     | 60   |      |
|                                   |                       |           | 0/15                  |                       |                          | 15                     |                    | 4     |                   | 0.02  | 4     |                     | 120  |      |
|                                   |                       |           | 0/20                  |                       |                          | 20                     |                    | 20    |                   | 0.04  | 20    |                     | 600  |      |
|                                   |                       | HCF Types | 0/ 5                  |                       |                          | 5                      |                    | 4     |                   | 0.02  | 4     |                     | 30   |      |
|                                   |                       |           | 0/10                  |                       |                          | 10                     |                    | 8     |                   | 0.02  | 8     |                     | 60   |      |
|                                   |                       |           | 0/15                  |                       |                          | 15                     |                    | 16    |                   | 0.02  | 16    |                     | 120  |      |
| V <sub>OH</sub>                   | Output High Voltage   | 0/ 5      |                       | < 1                   | 5                        | 4.95                   |                    | 4.95  |                   |       | 4.95  |                     | V    |      |
|                                   |                       | 0/10      |                       | < 1                   | 10                       | 9.95                   |                    | 9.95  |                   |       | 9.95  |                     |      |      |
|                                   |                       | 0/15      |                       | < 1                   | 15                       | 14.95                  |                    | 14.95 |                   |       | 14.95 |                     |      |      |
| V <sub>OL</sub>                   | Output Low Voltage    | 5/0       |                       | < 1                   | 5                        |                        | 0.05               |       |                   | 0.05  |       | 0.05                | V    |      |
|                                   |                       | 10/0      |                       | < 1                   | 10                       |                        | 0.05               |       |                   | 0.05  |       | 0.05                |      |      |
|                                   |                       | 15/0      |                       | < 1                   | 15                       |                        | 0.05               |       |                   | 0.05  |       | 0.05                |      |      |
| V <sub>IH</sub>                   | Input High Voltage    |           | 0.5/4.5               | < 1                   | 5                        | 3.5                    |                    | 3.5   |                   |       | 3.5   |                     | V    |      |
|                                   |                       |           | 1/9                   | < 1                   | 10                       | 7                      |                    | 7     |                   |       | 7     |                     |      |      |
|                                   |                       |           | 1.5/13.5              | < 1                   | 15                       | 11                     |                    | 11    |                   |       | 11    |                     |      |      |
| V <sub>IL</sub>                   | Input Low Voltage     |           | 4.5/0.5               | < 1                   | 5                        |                        | 1.5                |       |                   | 1.5   |       | 1.5                 | V    |      |
|                                   |                       |           | 9/1                   | < 1                   | 10                       |                        | 3                  |       |                   | 3     |       | 3                   |      |      |
|                                   |                       |           | 13.5/1.5              | < 1                   | 15                       |                        | 4                  |       |                   | 4     |       | 4                   |      |      |
| I <sub>OH</sub>                   | Output Drive Current  | HCC Types | 0/ 5                  | 2.5                   |                          | 5                      | − 2                |       | − 1.6             | − 3.2 |       | − 1.15              |      | mA   |
|                                   |                       |           | 0/ 5                  | 4.6                   |                          | 5                      | − 0.64             |       | − 0.51            | − 1   |       | − 0.36              |      |      |
|                                   |                       |           | 0/10                  | 9.5                   |                          | 10                     | − 1.6              |       | − 1.3             | − 2.6 |       | − 0.9               |      |      |
|                                   |                       |           | 0/15                  | 13.5                  |                          | 15                     | − 4.2              |       | − 3.4             | − 6.8 |       | − 2.4               |      |      |
|                                   |                       | HCF Types | 0/ 5                  | 2.5                   |                          | 5                      | − 1.53             |       | − 1.36            | − 3.2 |       | − 1.1               |      |      |
|                                   |                       |           | 0/ 5                  | 4.6                   |                          | 5                      | − 0.52             |       | − 0.44            | − 1   |       | − 0.36              |      |      |
|                                   |                       |           | 0/10                  | 9.5                   |                          | 10                     | − 1.3              |       | − 1.1             | − 2.6 |       | − 0.9               |      |      |
|                                   |                       |           | 0/15                  | 13.5                  |                          | 15                     | − 3.6              |       | − 3.0             | − 6.8 |       | − 2.4               |      |      |
| I <sub>OL</sub>                   | Output Sink Current   | HCC Types | 0/ 5                  | 0.4                   |                          | 5                      | 0.64               |       | 0.51              | 1     |       | 0.36                | mA   |      |
|                                   |                       |           | 0/10                  | 0.5                   |                          | 10                     | 1.6                |       | 1.3               | 2.6   |       | 0.9                 |      |      |
|                                   |                       |           | 0/15                  | 1.5                   |                          | 15                     | 4.2                |       | 3.4               | 6.8   |       | 2.4                 |      |      |
|                                   |                       | HCF Types | 0/ 5                  | 0.4                   |                          | 5                      | 0.52               |       | 0.44              | 1     |       | 0.36                |      |      |
|                                   |                       |           | 0/10                  | 0.5                   |                          | 10                     | 1.3                |       | 1.1               | 2.6   |       | 0.9                 |      |      |
|                                   |                       |           | 0/15                  | 1.5                   |                          | 15                     | 3.6                |       | 3.0               | 6.8   |       | 2.4                 |      |      |
| I <sub>IH</sub> , I <sub>IL</sub> | Input Leakage Current | HCC Types | 0/18                  | Any Input             | 18                       |                        | ± 0.1              |       | ±10 <sup>−5</sup> | ± 0.1 |       | ± 1                 | μA   |      |
|                                   |                       | HCF Types | 0/15                  |                       | 15                       |                        | ± 0.3              |       | ±10 <sup>−5</sup> | ± 0.3 |       | ± 1                 |      |      |
| C <sub>I</sub>                    | Input Capacitance     |           |                       | Any Input             |                          |                        |                    |       | 5                 | 7.5   |       |                     | pF   |      |

\* T<sub>Low</sub> = - 55°C for **HCC** device : - 40°C for **HCF** device.\* T<sub>High</sub> = + 125°C for **HCC** device : + 85°C for **HCF** device.The Noise Margin for both "1" and "0" level is : 1V min. with V<sub>DD</sub> = 5V, 2V min. with V<sub>DD</sub> = 10V, 2.5 V min. with V<sub>DD</sub> = 15V.


**DYNAMIC ELECTRICAL CHARACTERISTICS** ( $T_{amb} = 25^{\circ}\text{C}$ ,  $C_L = 50\text{pF}$ ,  $R_L = 200\text{k}\Omega$ , typical temperature coefficient for all  $V_{DD} = 0.3\%/^{\circ}\text{C}$  values, all input rise and fall time = 20ns)

| Symbol                | Parameter              | Test Conditions |              | Value |      |      | Unit |
|-----------------------|------------------------|-----------------|--------------|-------|------|------|------|
|                       |                        |                 | $V_{CC}$ (V) | Min.  | Typ. | Max. |      |
| $t_{PLH}$ , $t_{PHL}$ | Propagation Delay Time |                 | 5            |       | 140  | 280  | ns   |
|                       |                        |                 | 10           |       | 65   | 130  |      |
|                       |                        |                 | 15           |       | 50   | 100  |      |
| $t_{TLH}$ , $t_{THL}$ | Transition Time        |                 | 5            |       | 100  | 200  | ns   |
|                       |                        |                 | 10           |       | 50   | 100  |      |
|                       |                        |                 | 15           |       | 40   | 80   |      |


Typical Output Low (sink) Current Characteristics.

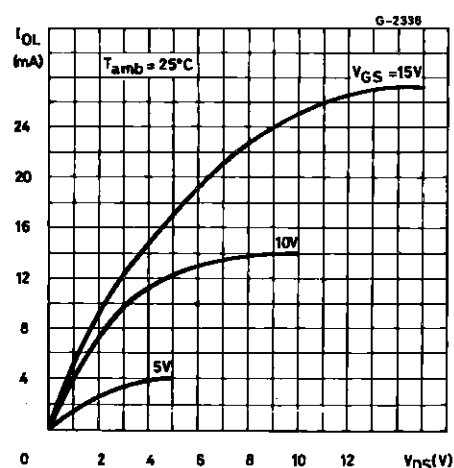


Minimum Output Low (sink) Current Characteristics.

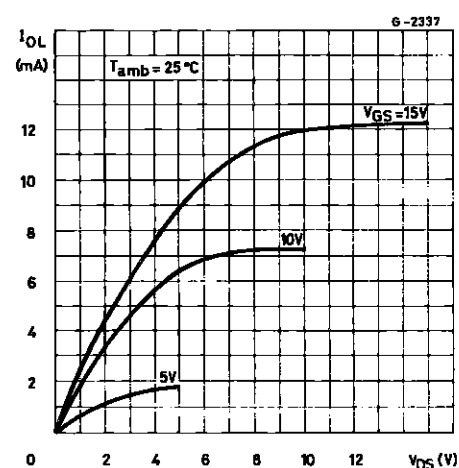





Typical Output High (source) Current Characteristics.

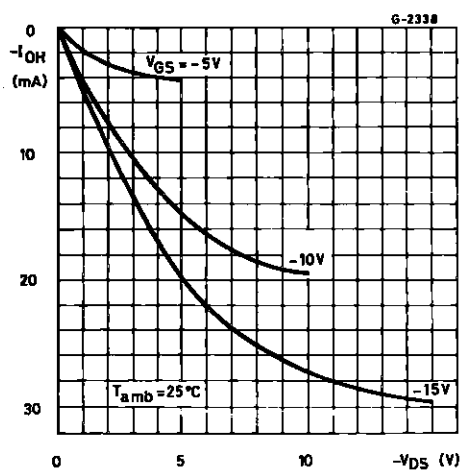

Minimum Output High (source) Current Characteristics.

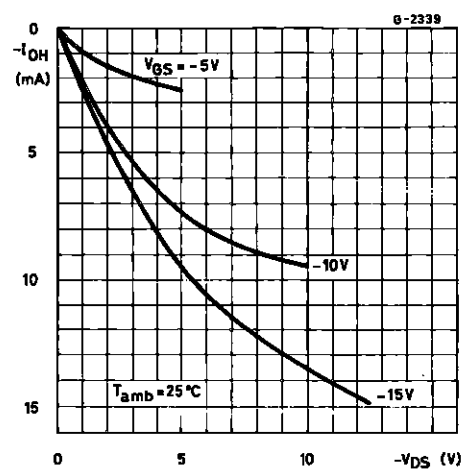

## TYPICAL APPLICATIONS

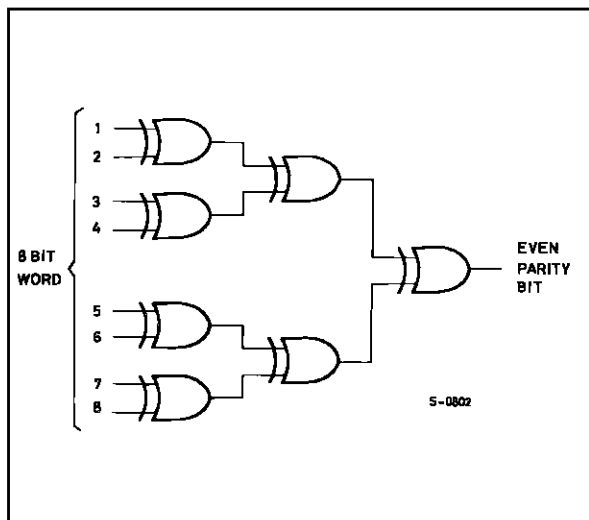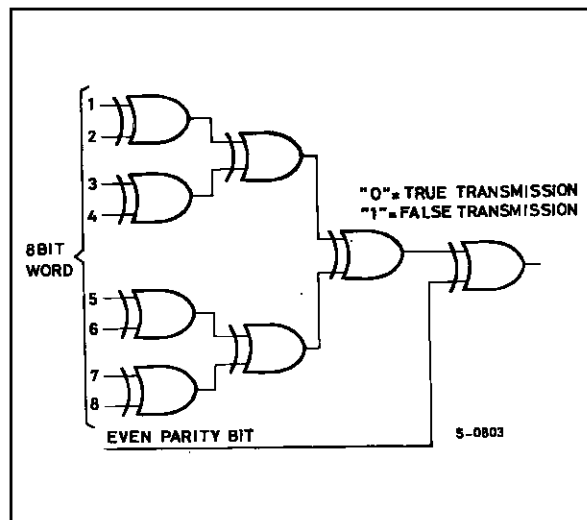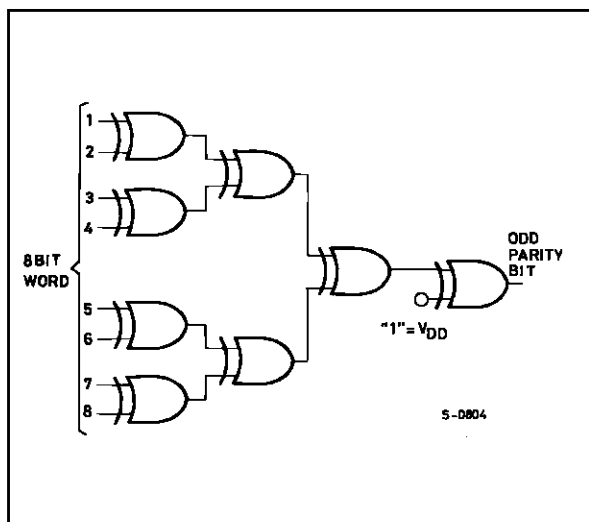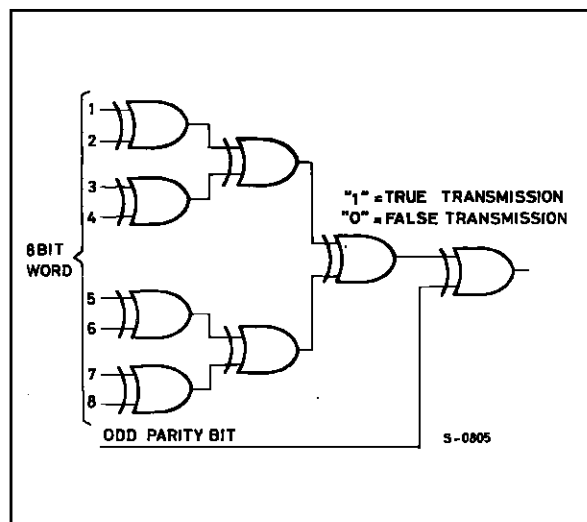
EVEN-PARITY-BIT GENERATOR  
(1-3/4 x HCC/HCF4030B).EVEN-PARITY-CHECKER  
(2 x HCC/HCF4030B).ODD-PARITY-BIT GENERATOR  
(2 x HCC/HCF4030B).ODD-PARITY CHECKER  
(2 x HCC/HCF4030B).






## Plastic DIP14 MECHANICAL DATA

| DIM. | mm   |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 1.39 |       | 1.65 | 0.055 |       | 0.065 |
| b    |      | 0.5   |      |       | 0.020 |       |
| b1   |      | 0.25  |      |       | 0.010 |       |
| D    |      |       | 20   |       |       | 0.787 |
| E    |      | 8.5   |      |       | 0.335 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 15.24 |      |       | 0.600 |       |
| F    |      |       | 7.1  |       |       | 0.280 |
| I    |      |       | 5.1  |       |       | 0.201 |
| L    |      | 3.3   |      |       | 0.130 |       |
| Z    | 1.27 |       | 2.54 | 0.050 |       | 0.100 |

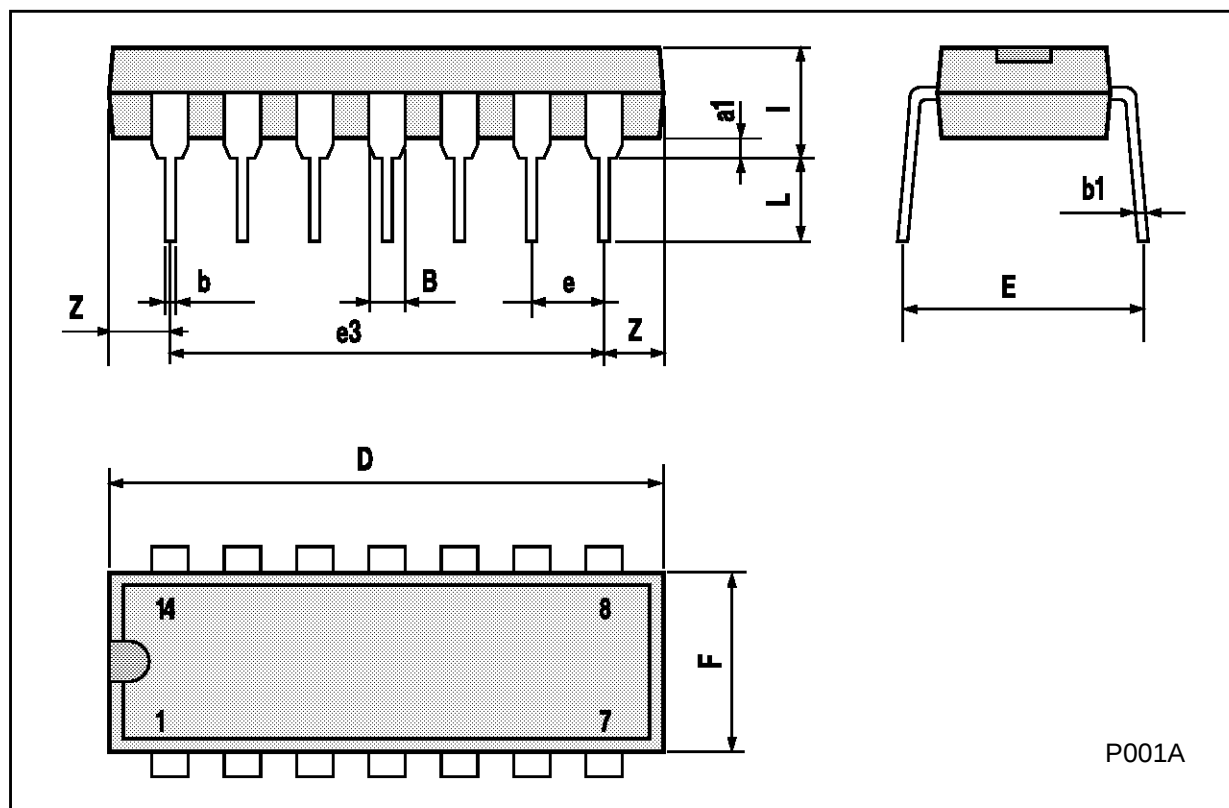

## Ceramic DIP14/1 MECHANICAL DATA


| DIM. | mm   |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |      |       | 20   |       |       | 0.787 |
| B    |      |       | 7.0  |       |       | 0.276 |
| D    |      | 3.3   |      |       | 0.130 |       |
| E    | 0.38 |       |      | 0.015 |       |       |
| e3   |      | 15.24 |      |       | 0.600 |       |
| F    | 2.29 |       | 2.79 | 0.090 |       | 0.110 |
| G    | 0.4  |       | 0.55 | 0.016 |       | 0.022 |
| H    | 1.17 |       | 1.52 | 0.046 |       | 0.060 |
| L    | 0.22 |       | 0.31 | 0.009 |       | 0.012 |
| M    | 1.52 |       | 2.54 | 0.060 |       | 0.100 |
| N    |      |       | 10.3 |       |       | 0.406 |
| P    | 7.8  |       | 8.05 | 0.307 |       | 0.317 |
| Q    |      |       | 5.08 |       |       | 0.200 |

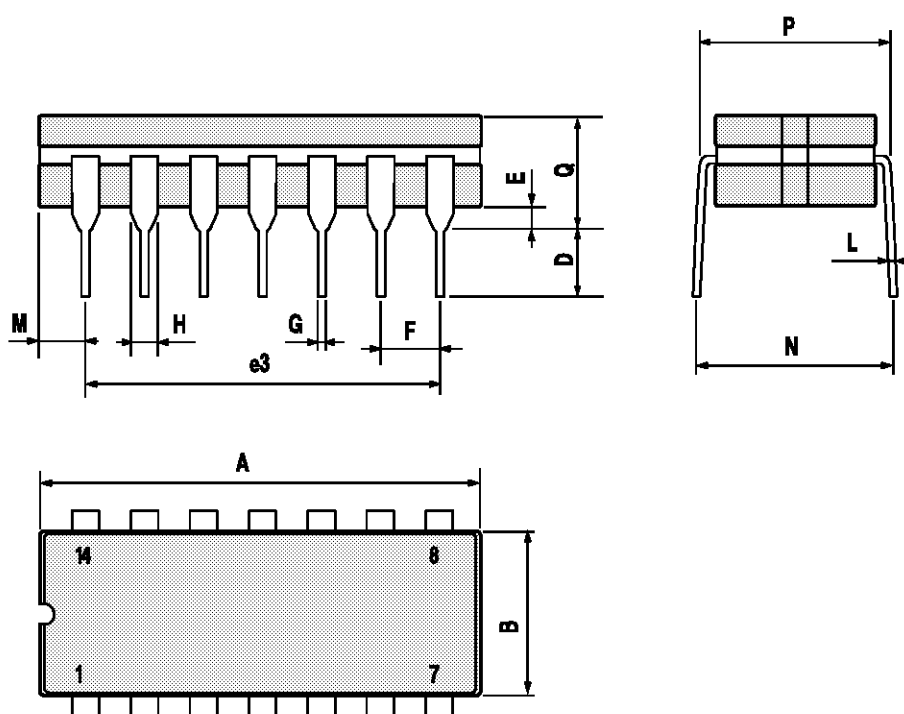

P053C


## SO14 MECHANICAL DATA

| DIM. | mm         |      |      | inch  |       |       |
|------|------------|------|------|-------|-------|-------|
|      | MIN.       | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    |            |      | 1.75 |       |       | 0.068 |
| a1   | 0.1        |      | 0.2  | 0.003 |       | 0.007 |
| a2   |            |      | 1.65 |       |       | 0.064 |
| b    | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C    |            | 0.5  |      |       | 0.019 |       |
| c1   | 45° (typ.) |      |      |       |       |       |
| D    | 8.55       |      | 8.75 | 0.336 |       | 0.344 |
| E    | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e    |            | 1.27 |      |       | 0.050 |       |
| e3   |            | 7.62 |      |       | 0.300 |       |
| F    | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M    |            |      | 0.68 |       |       | 0.026 |
| S    | 8° (max.)  |      |      |       |       |       |

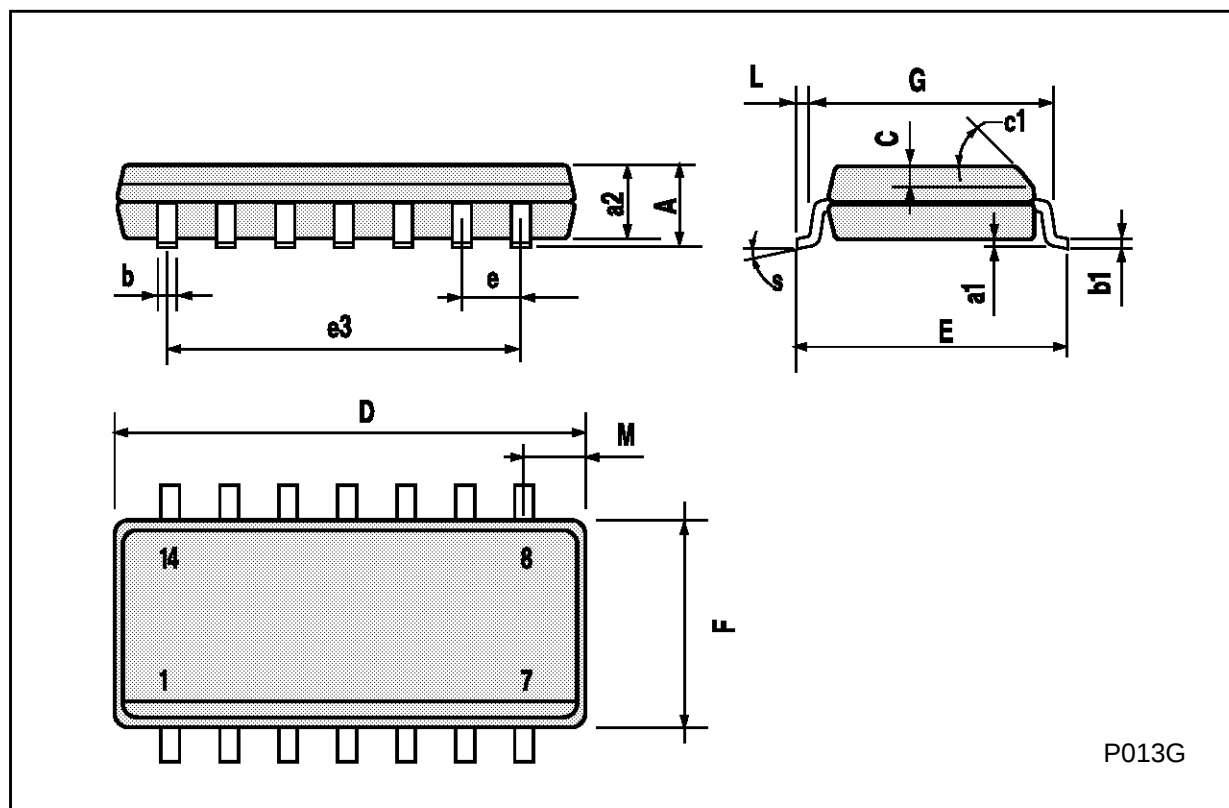

## PLCC20 MECHANICAL DATA

| DIM. | mm   |      |       | inch  |       |       |
|------|------|------|-------|-------|-------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 9.78 |      | 10.03 | 0.385 |       | 0.395 |
| B    | 8.89 |      | 9.04  | 0.350 |       | 0.356 |
| D    | 4.2  |      | 4.57  | 0.165 |       | 0.180 |
| d1   |      | 2.54 |       |       | 0.100 |       |
| d2   |      | 0.56 |       |       | 0.022 |       |
| E    | 7.37 |      | 8.38  | 0.290 |       | 0.330 |
| e    |      | 1.27 |       |       | 0.050 |       |
| e3   |      | 5.08 |       |       | 0.200 |       |
| F    |      | 0.38 |       |       | 0.015 |       |
| G    |      |      | 0.101 |       |       | 0.004 |
| M    |      | 1.27 |       |       | 0.050 |       |
| M1   |      | 1.14 |       |       | 0.045 |       |

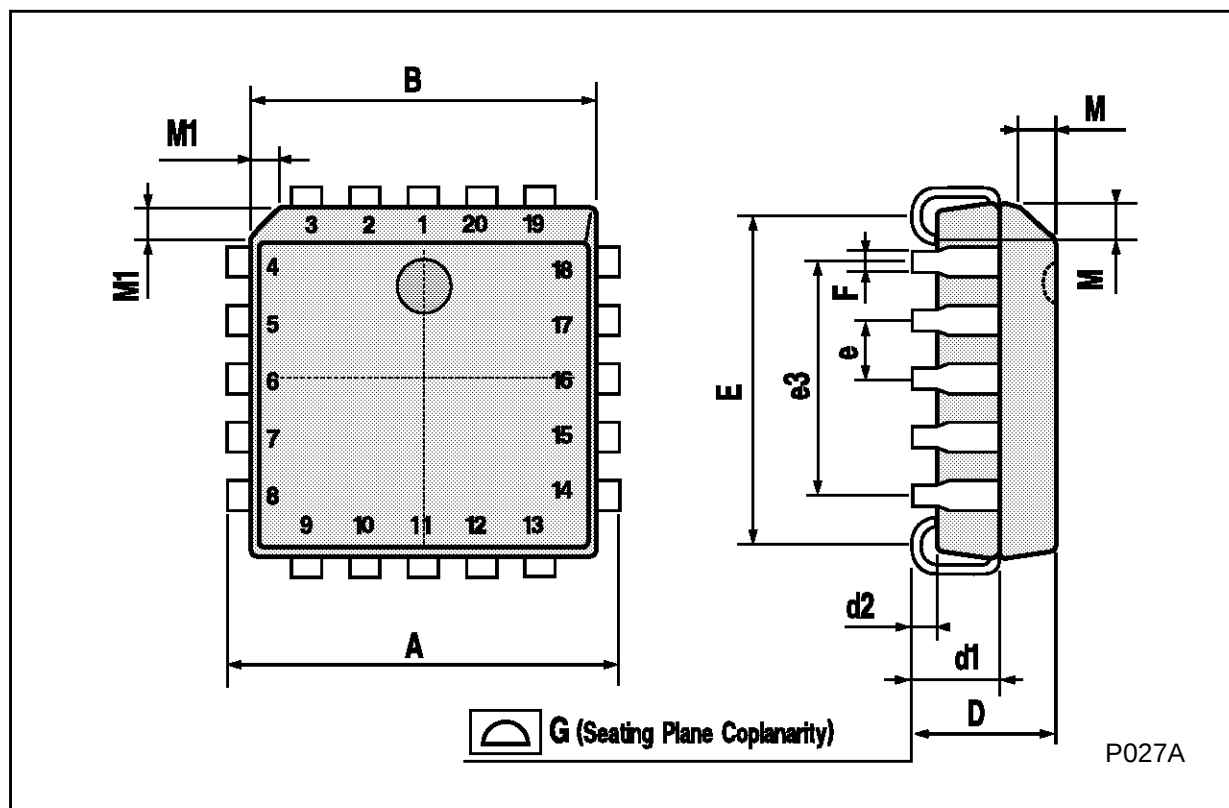

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1996 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A